

DR™ Products in Family


GRL1333U/1GB (1 x 1GB 1Rx8 DIMMs)
 GRL1333U/2GB (1 x 2GB 2Rx8 DIMMs)
 GRL1333U/4GB (1 x 4GB 2Rx8 DIMMs)



Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ± 0.075 Fully RoHS Compliant	Each GRL1333U upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	Dell Product	Supported in these Dell systems:
GRL1333U/1GB	A2626070, A2626091, A2626065, A2626096, A2626075, A2626078, A3116541, A3132554, A2626080, A2626087, A2626068, A2626077, A2626063, A2626094, A2626073, A2626062, A2626099, A2626084, A2626089, A3132555.	Dell PowerEdge M610, M710, R210, R310, R410, R510, R610, R710, T110, T310, T410, T610, T710, C1100, C2100, C6100 and Precision T3500, T5500, T7500
GRL1333U/2GB		
GRL1333U/4GB		Note: The 4GB DIMM is supported only in the T3500

Front view

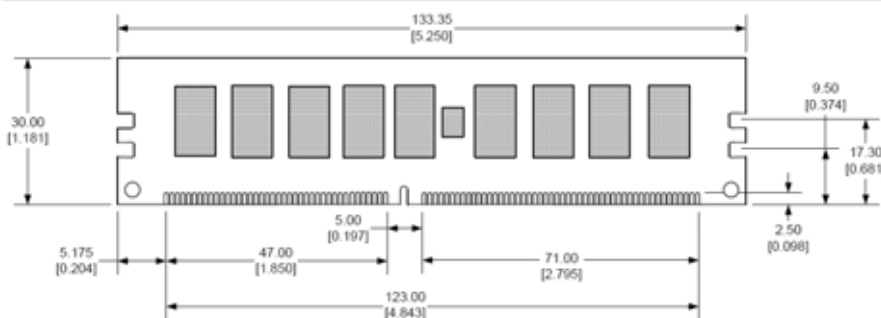


Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).

All dimensions are expressed in millimeters [inches]

Back view

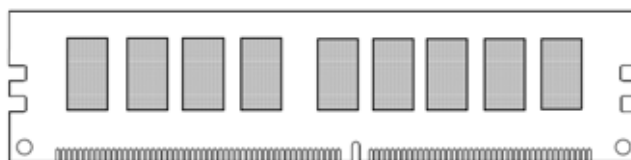

Side view

